

# Gefen

## 1:5 Splitter For HDMI™ 1.3

Model # EXT-HDMI1.3-145

USER MANUAL



[www.gefen.com](http://www.gefen.com)

1080P  
PROGRESSIVE

HDMI  
HIGH DEFINITION MULTIMEDIA INTERFACE

HD TV

HD DVD

Blu-ray Disc

## ASKING FOR ASSISTANCE

---

### Technical Support:

Telephone (818) 772-9100  
(800) 545-6900

Fax (818) 772-9120

### Technical Support Hours:

8:00 AM to 5:00 PM Monday through Friday.

### Write To:

Gefen Inc.  
c/o Customer Service  
20600 Nordhoff Street  
Chatsworth, CA 91311

[www.gefen.com](http://www.gefen.com)  
[support@gefen.com](mailto:support@gefen.com)

### Notice

Gefen Inc. reserves the right to make changes in the hardware, packaging and any accompanying documentation without prior written notice.

**1:5 Splitter For HDMI 1.3** is a trademark of Gefen Inc.  
**HDMI** is a trademark of [hdmi.org](http://hdmi.org)

# TABLE OF CONTENTS

---

1. Introduction
2. Features
3. Panel Descriptions
4. Connecting and Operating the 1:5 Splitter for HDMI 1.3
5. Specifications
6. Warranty

# INTRODUCTION

---

The Gefen 1:5 Splitter for HDMI 1.3 allows set-top boxes, DVD players, Blu-ray players and other HDTV devices with HDMI outputs to be connected to up to five HDTV displays (or more if multiple splitters are utilized in place of HDTV displays)

## How It Works

The 1:5 Splitter for HDMI 1.3 is a distribution hub that sends the same HDMI signals to up to five HDTV digital displays. You simply connect your HDMI video source to the 1:5 HDMI 1.3 Splitters HDMI input jack, then connect your HDMI-compatible displays to each of the HDMI outputs. Power-cycle all equipment and you should see beautiful, sharp HDMI video on all of your HDMI displays.

---

## OPERATION NOTES

---

### READ THESE NOTES BEFORE INSTALLING OR OPERATING THE 1:5 SPLITTER FOR HDMI 1.3

- **Display information from the display connected to HDMI output port 1 is sent back to the source. Therefore, all other displays connected to the 1:5 Splitter for HDMI 1.3 must be capable of accepting the timings and resolutions of the display that is connected to HDMI output port 1. It is recommended that the display with the lowest native resolution be connected to HDMI output port 1. This is to ensure that a compatible video signal will be able to be displayed on all connected monitors.**
- HDMI/HDCP compliant
- Compatible with all HDMI and DVI\* displays

\*When used with a HDMI to DVI adapter

# FEATURES

---

## Features



- Lip-Sync Pass Through
- 225 MHz (up to 12 bit YUV 444 supported @ 1080p)
- Deep Color Supported (XV Color Supported)
- Color Space Conversion Supported
- Dolby Tru-HD & DTS Master Supported
- CEC Pass Through

## Includes:

- (1) 1:5 Splitter for HDMI 1.3
- (1) 6 ft HDMI cable (m-m)
- (1) 24V DC Power Supply
- (1) Set of Rack Ears
- (1) User's Manual



# PANEL DESCRIPTIONS

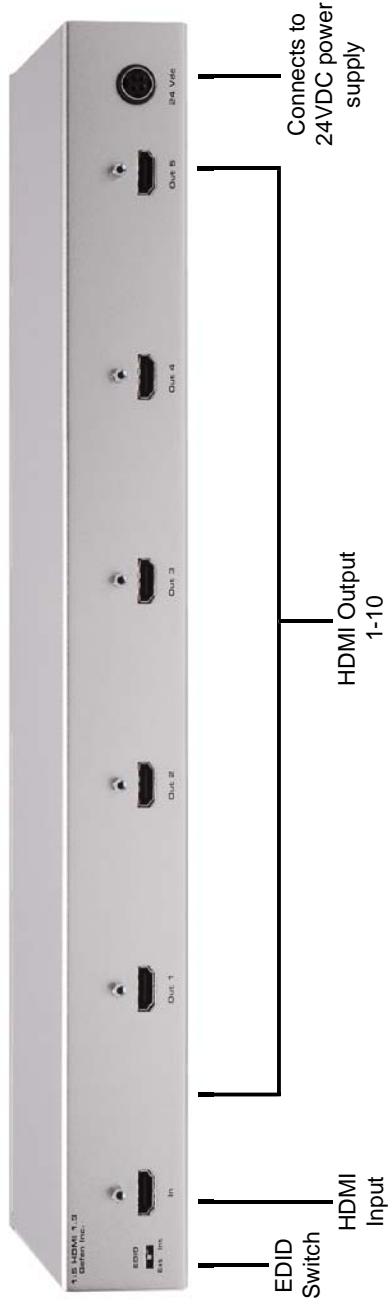

# CONNECTING AND OPERATING THE 1:5 SPLITTER FOR HDMI 1.3

---

## How to Connect the 1:5 Splitter for HDMI 1.3 to your devices

1. Connect the supplied cable from the HDTV HDMI source into the 1:5 Splitter for HDMI 1.3 input.
2. Connect the cables from your displays (monitor or projector) into the HDMI outs of the 1:5 Splitter for HDMI 1.3.
3. Plug the 24VDC power supply into the 1:5 Splitter for HDMI 1.3.

**NOTE:** Display information from the display connected to HDMI output port 1 is sent back to the source. Therefore, all other displays connected to the 1:5 Splitter for HDMI 1.3 must be capable of accepting the timings and resolutions of the display that is connected to HDMI output port 1. It is recommended that the display with the lowest native resolution be connected to HDMI output port 1. This is to ensure that a compatible video signal will be able to be displayed on all connected monitors. There is a generic 1080i EDID programmed into the 1:5 Splitter for HDMI 1.3 that can be used instead. Please see below for the activation process.

## EDID SWITCH

---

The HDMI 1:5 has an EDID Switch which will determine if you are going to use the EDID from the display attached to output 1 or use an onboard EDID.

If you want to use the EDID from the display attached to output 1, make sure the switch is selected to "EXT".

If you want to use the onboard EDID, make sure the switch is selected to "INT" which will give you a generic EDID of 1080i.

## SPECIFICATIONS

---

Video Amplifier Bandwidth.....	225 MHz
Input Video Signal.....	1.2 volts p-p
Input DDC Signal.....	5 volts p-p (TTL)
Single Link Range.....	1080p/1920 x 1200
HDMI Connector.....	type A 19 pin female
Power Supply.....	24V DC
Power Consumption.....	60 watts (max)
Dimensions.....	17"W x 1.75"H x 5.5"D
Rackmountable.....	1U rack space
Shipping Weight.....	5 lbs.